



1800 max

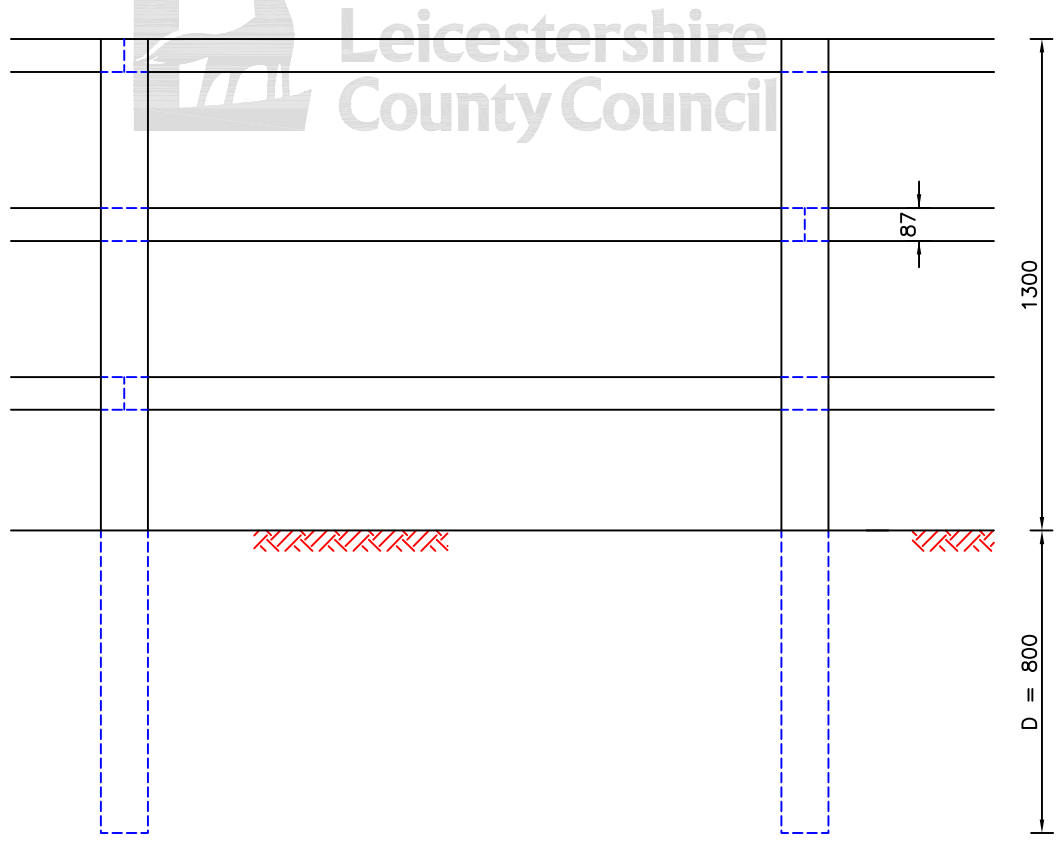


38

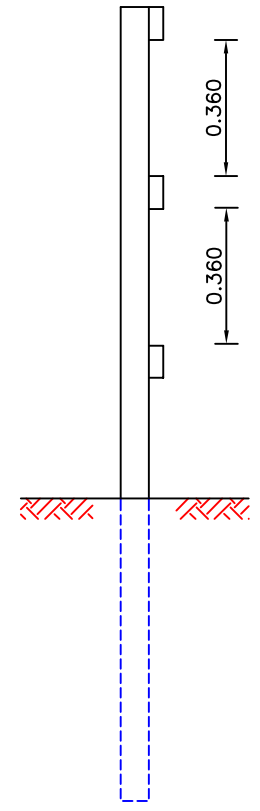

1300
D = 800

RAIL SECTION	MAIN POSTS LENGTH SECTION	NUMBER OF RAILS	HEIGHT TO TOP OF TOP RAIL	VALUE OF D
38 x 87	2100 75 x 125	3	1300	800



Leicestershire County Council

NOTES:

GENERAL

- All dimensions are in millimetres unless otherwise stated.
- This type of fencing is not intended for accommodation works applications but for protective fencing alongside cycleways where steep embankments or other dangers are present.
- Where the fence is erected alongside a cycleway, the rails should be nailed on the cycleway side of the posts and set back 500mm from the edge of the cycleway.
- Fencing to follow the ground profile with small adjustments to height as necessary to obtain flowing alignment.

MATERIALS

- All timber shall comply with 'Specification for Highway Works - 6th Edition' Clause 304 and CCA preservation to BS4072.
- Nails shall be 4mm x 100mm galvanised in accordance with the requirements of BS729.

ERECTION

- See Standard Drg No SD/3/16A

©Crown copyright 2007. All rights reserved. Use of this image is limited to viewing on-line and printing one copy. Leicestershire County Council. 100019271.