




- NOTES:
1. All dimensions are in millimetres unless otherwise stated.
 2. If depth of ditch exceeds 1.2m or pipe exceeds 600mm then seek guidance from LCC Highway Design Structures Section Tel No **[0116 265 7152]**.
 3. Backfill to the wall should commence only when mortar has received sufficient curing time. Fill should be brought up equally to both sides of the wall to avoid excessive pressures.
 4. This type of headwall is not suitable for pipes entering or outfalling from the sides of ditches. For this situation a concrete ditch lining should be used for pipes upto 300mm diameter (see Drg No **[SD/5/31]**). Where pipes exceed 300mm, a headwall based on Drg No **[SD/5/28]** should be used.

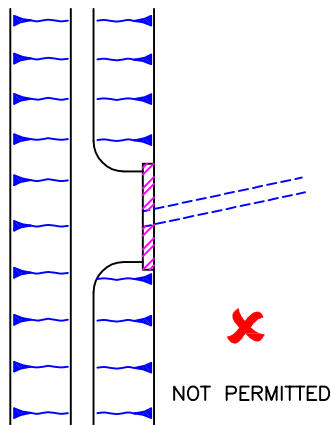

NOT PERMITTED

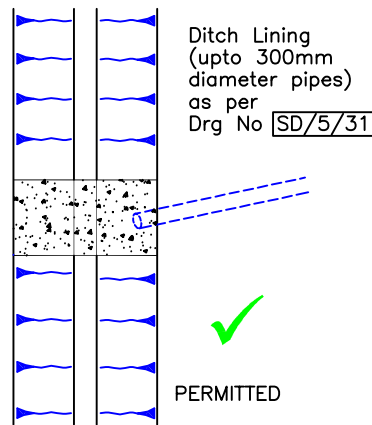

PERMITTED

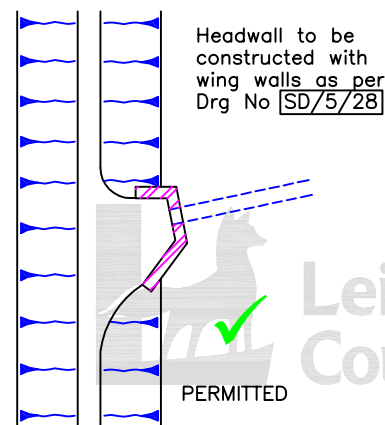

PERMITTED

ARRANGEMENTS WHERE PIPES ENTER DITCH FROM THE SIDE
(See Note 3)

Leicestershire
County Council

©Crown copyright 2007. All rights reserved. Use of this image is limited to viewing on-line and printing one copy. Leicestershire County Council. 100019271.

DRAWING NUMBER	DATE			
SD/5/27	SEPTEMBER 2002			
AUTOCAD REF	SCALE			
K:\GENERAL\ID997\STDDRG\SD527	NOT TO SCALE	Rev	Date	Notes on Revision