


IN CUT

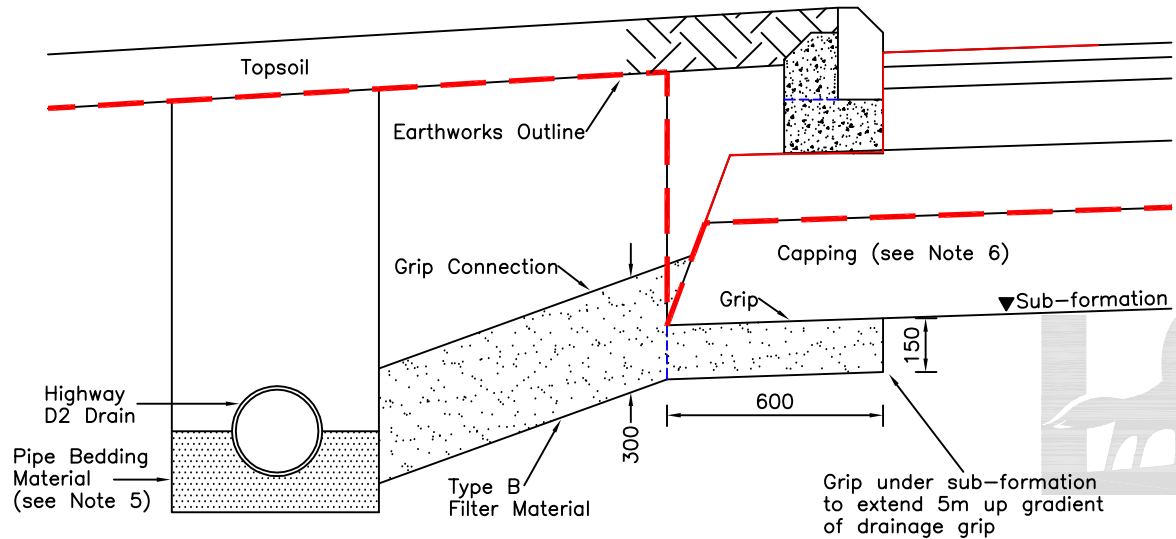

IN FILL

NOTES:

1. All dimensions are in millimetres unless otherwise stated.
2. The detail shown applies to verges and central reservations where capping or sub-base does not extend into filter drain.
3. Grip and grip connections to be 600mm wide.
4. Grip and grip connections to be provided at 50m intervals or as directed by the Engineer.
5. Where drainage grips discharge into the pipe bedding material of highway D2 drains then the bedding material should be drained by the weepholes provided in catchpits (see Note 10 on Drg No [SD/5/16](#)). Where manholes are used in lieu of catchpits then alternative outfalls must be provided for the drainage grips.
6. Drainage grips and their connections shall be provided below the sub-base material on construction where capping layers are not required where sub-base is used in lieu of capping.
7. The Type B material shall be in accordance with Clause 505 and grading to Drg No [SD/5/1](#)